

A Grade Industrial Screen Projected Capacitive 10 Points Touch

1518L



A⁺

Grade A+ Panel
No bad pixel



PCAP Touch



Resolution
1024x768P



Intel Celeron/I3/I5/I7 CPU
Fanless/Fan



4G/8G/16G RAM
DDR 3/DDR4 optional



64G SSD,128/256G
SSD, 500G HDD
Msata/Sata optional

product Parameters

Supply voltage	100V-240V
Host voltage	12V 5A
Display	15.0"inch resolution 1024*768, 4:3 TFT LED
Touch screen	10point Capacitive Touch
CPU	Intel Celeron J4125 Quad core 2.0GHz
Memory	DDR4 4GB
Hard disk	Msata 64GB SSD
COM	2 RS232COM ports
USB	4*USB 2.0, 2*usb 3.0
LAN	1
Customer display port	1
Audio	1
Material	aluminium alloy case
Customer display	2x20 VFD
Customer screen	9.7" 1024x768
MSR	3-Track MSR
Net weight	7.1KG
Gross weight	7.85KG
Packaging volume	43*20*43CM

15.0"+9.7"

1024*768

235mm

360mm

190mm

280mm

420mm

1024*768
Resolution

4:3
aspect ratio



Rich Interfaces

DC in LAN VGA USB COM1
DC out Audio USB HDMI Display COM2



Neat and Rigorous Assembly Process



Easy Install Secondary Screen







Modular design VFD/ Card reader

Plug-and-Play



Stylish Design With Dual hinge Thinner Boarder, Slim Screen



OEM LOGO for smallbatch customers



Stable Touch Super Sensitive Touch

High performance true flat capacitive touch screen, more smooth touch experience



Dust-free/Oil-free Water-free

Fully Enclosed



Fanless Motherboard More Quite



Silence




Aluminum Alloy Housing

With strong cooling system
Good quality, Fast heat dissipation



Cable-hidden Design More Neat & Clean

Hidden cables on the back cover, Overall simplicity

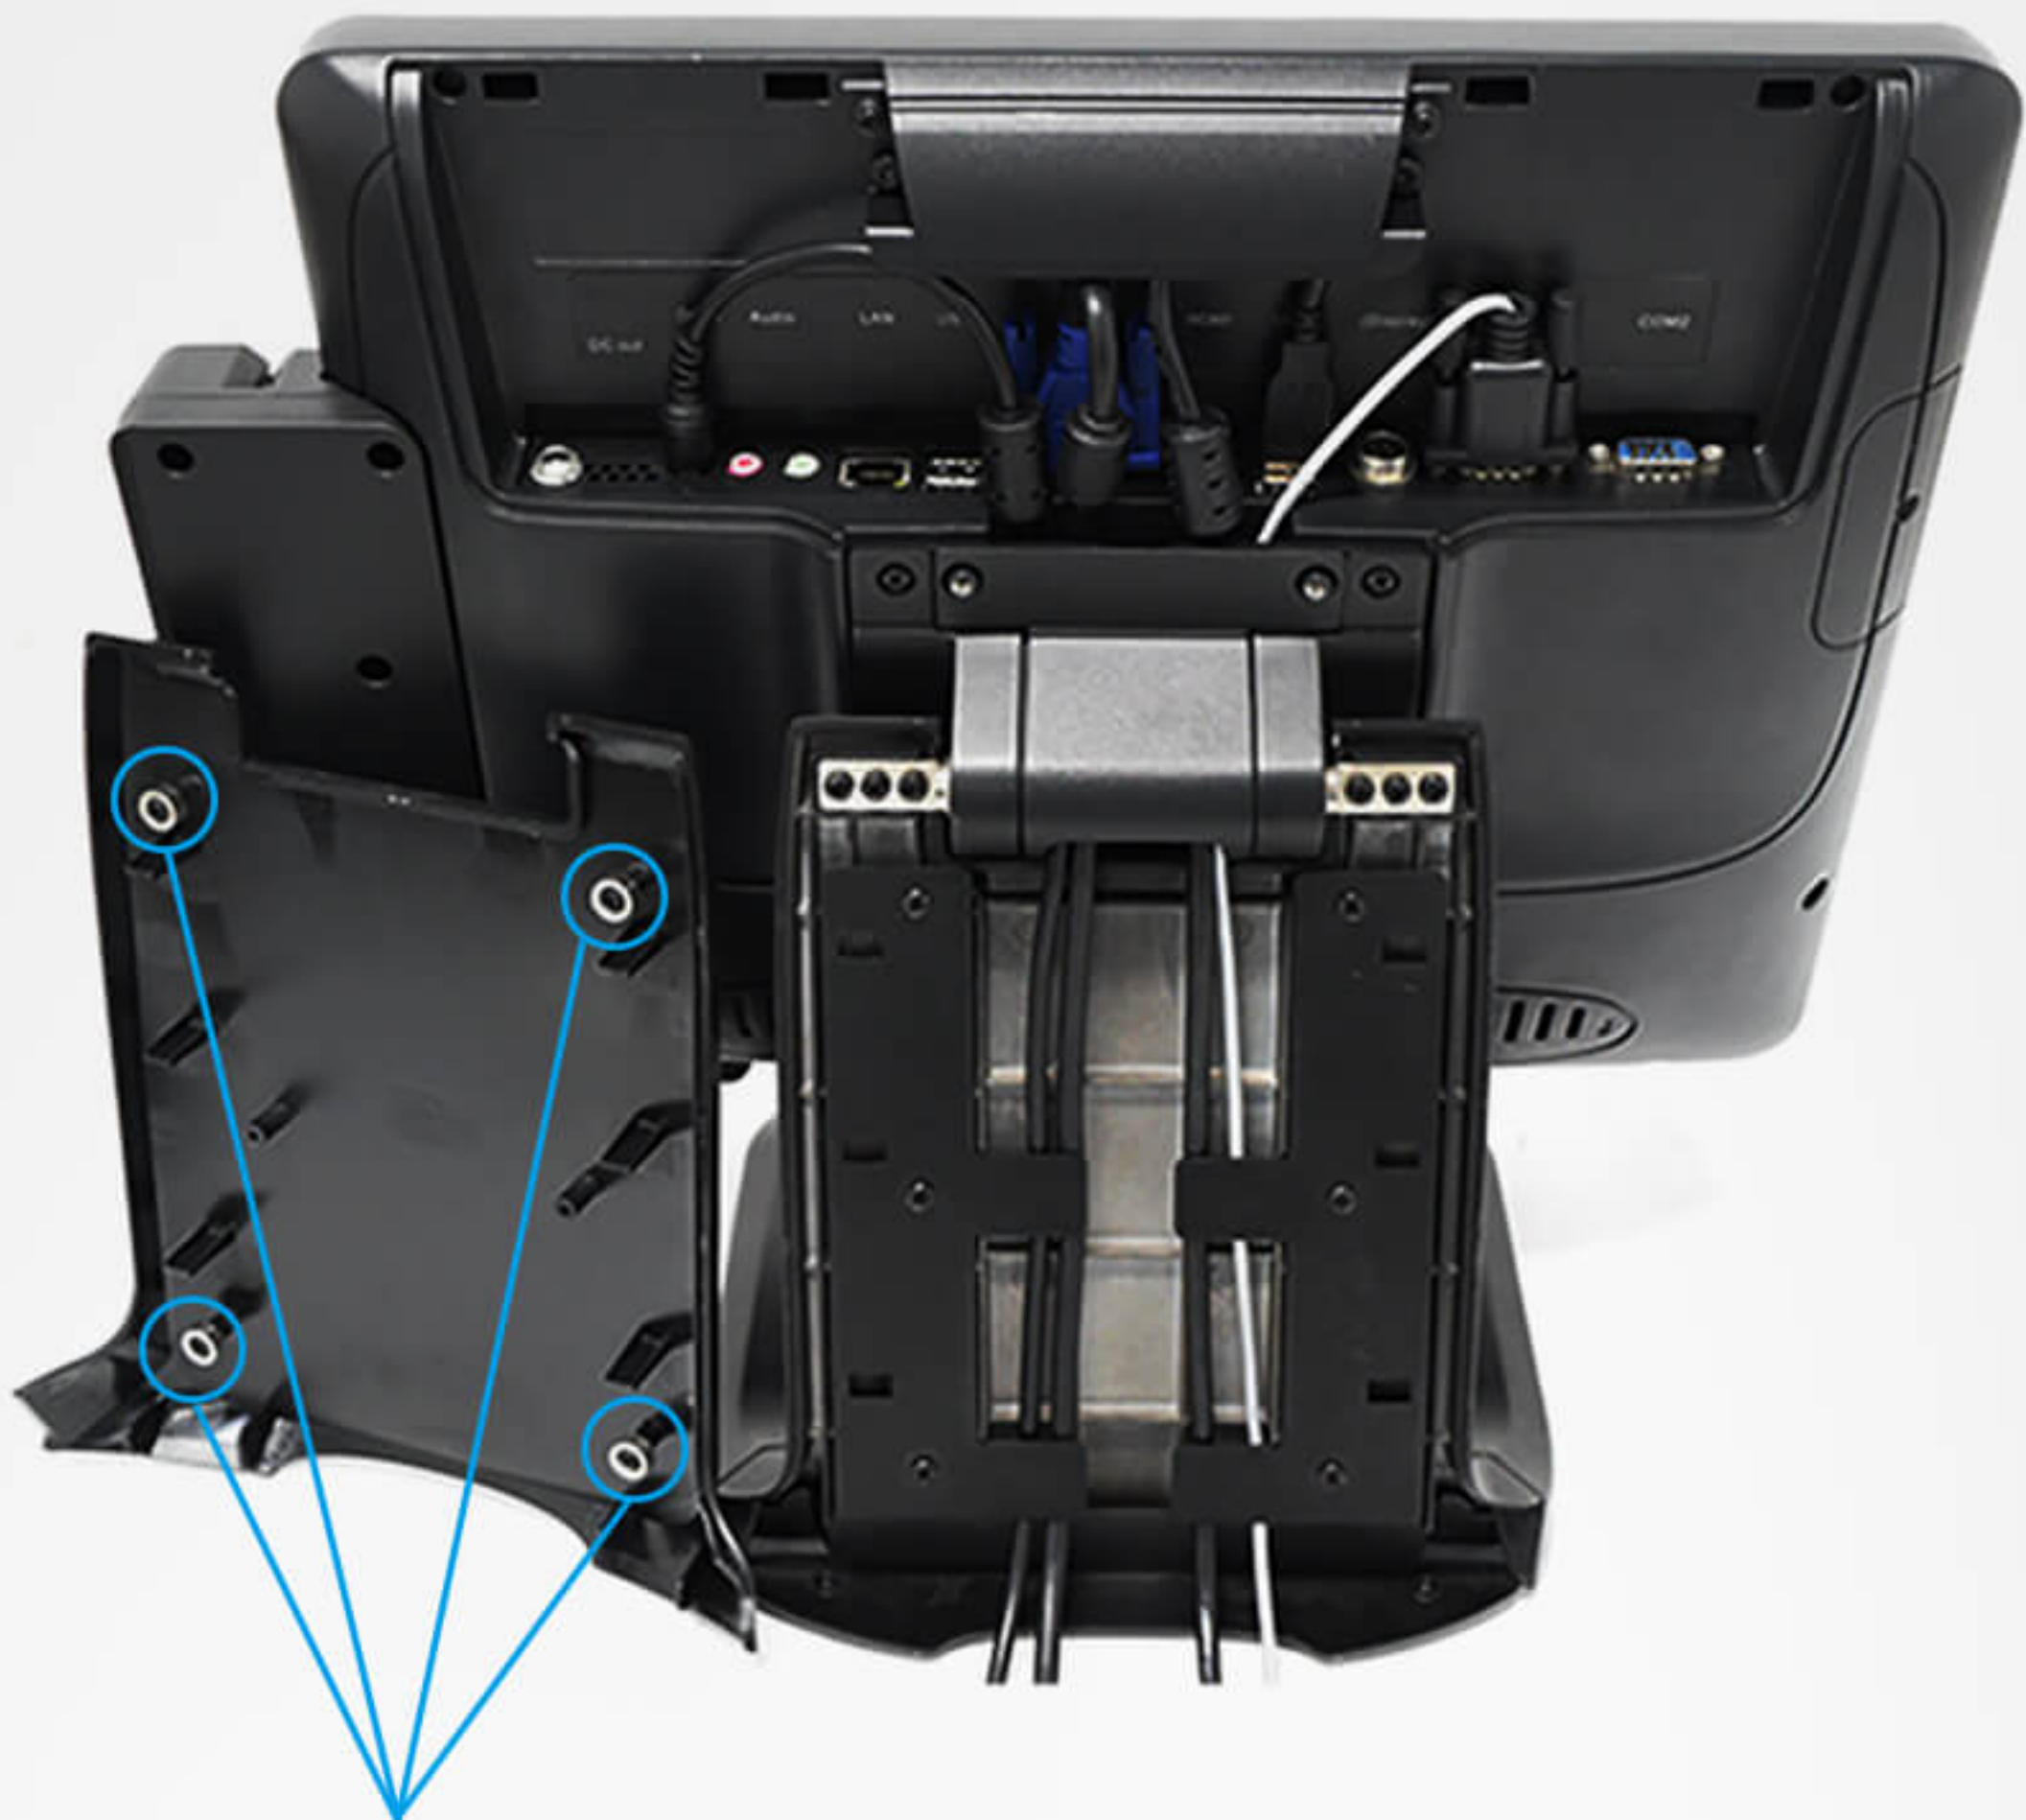

Magnetic suction position

Application Scenarios To Meet Customer Needs

